



MOD. THK



MOD. THB



MOD. THJ



MOD. THJ



MOD. THB



MOD. THB



MOD. THJ



MOD. THJ

TMC  CANCELA®

www.tmccancela.com
info@tmccancela.com



FIXED HAMMERS MULCHERS


TMC  CANCELA®
Javier Cancela

THQ
THI
THJ
THB
THK
THX
HYDRAULIC

QUALITY AND COMMITMENT ON WHAT WE DO

THE WAY WE WORK REMAINS FAITHFUL TO THE ORIGINS OF TMC CANCELA.
Our main target is to provide the best equipment and guarantee the excellence of our products. Immersed in a constant learning, we incorporate the latest technological innovations to our processes, achieving robust and efficient machinery adapted to the needs of the market.

tmccancela.com

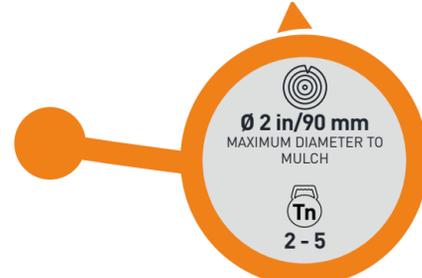

THQ



THI



THJ



THB



THK



THX

TECHNICAL FEATURES

MOD.	THQ-050	THQ-075	THI-075	THI-100	THI-125	THJ-100	THJ-125	THB-100	THB-125	THK-125	THK-150	THX-150
Working width (in/m)	20 / 0.50	30 / 0.75	30 / 0.75	40 / 1.00	50 / 1.25	40 / 1.00	50 / 1.25	40 / 1.00	50 / 1.25	50 / 1.25	60 / 1.50	60 / 1.50
Total width (in/m)	35 / 0.90	45 / 1.15	40 / 1.02	52 / 1.30	60 / 1.55	55 / 1.38	65 / 1.63	55 / 1.37	65 / 1.62	68 / 1.73	78 / 1.98	78 / 1.98
Required excavator weight Tn (min-max)	2-5		5-10			10-16		15-20		20-28		25-40
Required pressure range Bar/Psi (min-max)	2,610-3,625 / 180-250		2,600-4,000 / 180-280			4,000-5,500 / 280-380		4,000-5,500 / 280-380		4,000-5,500 / 280-380		3,600-5,500 / 250-380
Recommended flow range GPM / L/min	8-16 / 30-60		11-24 / 40-90	15-34 / 55-130	16-34 / 60-130	24-45 / 90-170	28-45 / 105-170	37-48 / 140-180	40-48 / 150-180	42-66 / 160-250	48-66 / 180-250	48-80 / 180-300
Rotor/s cutting diameter (in/mm)	13 / 325		13 / 325			15 / 375		16 / 415		18 / 455		20 / 510
Nr. of hammers	F49 + F39 / F09 + F39 / F08 + F38 F19 + F20 / F25 + F20 / F45 + F20		18 + 2	24 + 2	30 + 2	24 + 2	30 + 2	-	-	30 + 2	36 + 2	36 + 2
Nr. of knives	F18 + F20		-			-		22 + 2	28 + 2	30 + 2	36 + 2	36 + 2
Counterblades	2 replaceable rows		1 replaceable adjustable + 2 replaceable rows			5 replaceable rows		4 replaceable rows		4 replaceable rows		4 replaceable rows
Coupling	Bolted flange		Bolted flange			Bolted flange		Bolted flange		Bolted flange		Bolted flange
Nr. of belts - type	-		4 XPB			1 Poly Chain		1 Poly Chain		1 Poly Chain		1 Poly Chain
Skids	Sliding bolted		Sliding bolted			Sliding bolted (2 positions)		Sliding bolted (3 positions)		Sliding bolted		Sliding bolted
Weight (lbs/kg)	452 / 205	562 / 255	893 / 405	1,037 / 470	1,202 / 545	1,687 / 765	1,863 / 845	2,580 / 1,170	2,822 / 1,280	3,484 / 1,580	3,660 / 1,660	4,134 / 1,875

